

DESCRIPTION

INTRODUCTION: Wherever microphones must be adjustably yet stably positioned for reliable hands-free service, AKG's GN-Series goosenecks and ST-Series table stands offer the requisite dependability and style. Compatible with each other, and with a host of AKG (or other) microphones, stand adapters, connectors and fittings, these uniquely versatile units can be used in an almost limitless variety of configurations.

GN-SERIES MODULAR GOOSENECK KITS: The GN-7E/GN-7E-Black 7-inch kits, GN-14E/GN-14E-Black 14-inch kits and GN-20E 20-inch kit offer unprecedented microphone-mounting versatility. As shown in the Assembly Diagram overleaf, each kit contains interchangeable parts that thread and/or wire together in various ways to form *different* configurations.


The *standard* parts (supplied) make up goosenecks compatible with 5/8-in. -27 threads, 3-contact XLR-type connectors and/or 11/16-in. custom-mounting holes. There are *five* possible top-end/bottom-end configurations (with four of the bottom ends also shown in Mounting Suggestions overleaf):

- Top mated w/mic's stand adapter; bottom mated w/floor or table stand, boom, flange (cable *outside* gooseneck).
- Top mated w/mic's stand adapter; bottom custom-mounted on desk, table, lectern (cable *outside* gooseneck).
- Top mated w/mic's XLR plug; bottom mated w/stand, boom, flange (cable *inside* gooseneck via *side* exit hole).
- Top mated w/mic's XLR plug; bottom mounted on desk, table, lectern (cable *inside* gooseneck via *bottom* hole).
- Top mated w/mic's XLR plug; bottom mated w/console's, mixer's XLR "talkback" jack (cable *inside* gooseneck).

The *extra* parts (available from AKG) modify any *internally* cabled gooseneck into two more *optional* configurations:

- On/off switch at top.
- 1/4-in. phone plug at bottom (low- or high-Z unbalanced).

All goosenecks are available in matte-nickel finish, while the

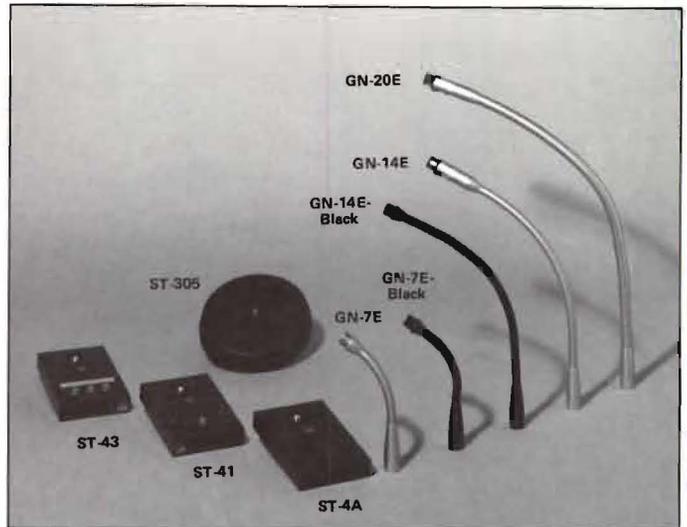

GN-7E-Black and GN-14E-Black versions offer the option of satin-black chrome. Each kit is supplied complete with comprehensive assembly and installation instructions.

ST-SERIES WEIGHTED TABLE STANDS: These sturdy units offer stable support for any gooseneck and stand adapter having 3/8-in. or 5/8-in. -27 threads. Four models are available: ST-4A basic stand; ST-41 one-pushbutton stand with signal lamp; ST-43 three-pushbutton stand with ID strip and signal lamp; ST-305 heavy-duty shock-mounted stand. Internal wiring details of the ST-41 and ST-43 are shown overleaf.

All stands are finished in matte black with contrasting accents. Each is supplied complete with a 3/8-in. to 5/8-in. -27 thread adapter (used for standard installations or removed for compatibility with units having the smaller-diameter thread). The ST-305 also includes a short mounting bolt (for installations at base height) and a 68-mm (≈2-11/16-in.) extension shaft (for installations *above* base height).

TECHNICAL DATA

GN-SERIES MODULAR GOOSENECK KITS:

Max. Permissible Mic Weights (goosenecks on *hor* surfaces):

GN-7E, GN-7E-Blk, GN-20E: 450 g (≈16 oz)

GN-14E, GN-14E-Blk: 225 g (≈9 oz)

Fittings: Std 5/8-in. -27 ext top thrds, int bottom thrds

Materials: Steel shafts; brass bosses and accys; finished in:

GN-7E, GN-14E, GN-20E: matte nickel (incl connectors)

GN-7E-Blk, GN-14E-Blk: black chrome (incl connectors)

Dimensions (less top threads or included accessories):

GN-7E, GN-7E-Blk: 163 mm (≈6-7/16 in.) long; 19 mm

(≈3/4 in.) boss diameter; 11 mm (≈7/16 in.) shaft diameter

GN-14E, GN-14E-Blk: 341 mm (≈13-7/16 in.) long; 19 mm

(≈3/4 in.) boss diameter; 11 mm (≈7/16 in.) shaft diameter

GN-20E: 494 mm (≈19-7/16 in.) long; 19 mm (≈3/4 in.)

boss diameter; 15 mm (≈9/16 in.) shaft diameter

Net Weights (less included accessories):

GN-7E, GN-7E-Blk: 115 g (≈4 oz)

GN-14E, GN-14E-Blk: 200 g (≈7 oz)

GN-20E: 425 g (≈15 oz)

Included Accessories: All *std* parts shown in assy diagram

Optional Accessories: All *extra* parts shown in assy diagram

ST-SERIES WEIGHTED TABLE STANDS:

Fittings: 3/8-in. or (w/incl adptrs) 5/8-in. -27 ext thrds

ST-41, ST-43 Pushbutton(s): DPDT momentary-contact type(s)

ST-41, ST-43 Lamp: 24-30V, 2W, T-3-1/4 screw-base type

Materials and Finishes:

ST-4A: blk-plastic base; metal weight; blk-rubber feet

ST-41, ST-43: as above w/red button(s); clr lamp lens

ST-305: blk-mtl base; gray-mtl shaft; rubber shock mnt

Dimensions (less top threads, trim, pushbuttons, lenses):

ST-4A, ST-41, ST-43: 23.5 mm (≈15/16 in.) high; 89 mm

(≈3-1/2 in.) wide; 150 mm (≈5-7/8 in.) deep

ST-305: 39 mm (≈1-9/16 in.) high less ext shaft; 107 mm

(≈4-3/16 in.) high w/ext shaft; 157 mm (≈6-3/16 in.)

base diameter; 19 mm (≈3/4 in.) ext-shaft diameter

Net Weights (less included accessories):

ST-4A: 370 g (≈13 oz) ST-43: 425 g (≈15 oz)

ST-41: 395 g (≈14 oz) ST-305: 2.5 kg (≈5-1/2 lb)

Included Accessories:

All ST-s: thrd adptr (3/8-in. int to 5/8-in. -27 ext)

ST-305: short bolt, ext shaft (both 3/8-in. ext thrd)

See diagrams overleaf for further data.

