

Micro Amp Series



Micro DA

DA1000
SINGLE 1 by 8

DA2008
DUAL 1 by 4



**AUDIO
TECHNOLOGIES
INCORPORATED**


Dedicated to sound engineering

Sound reasons to specify ATI

DA1000

DA2008

Micro DA

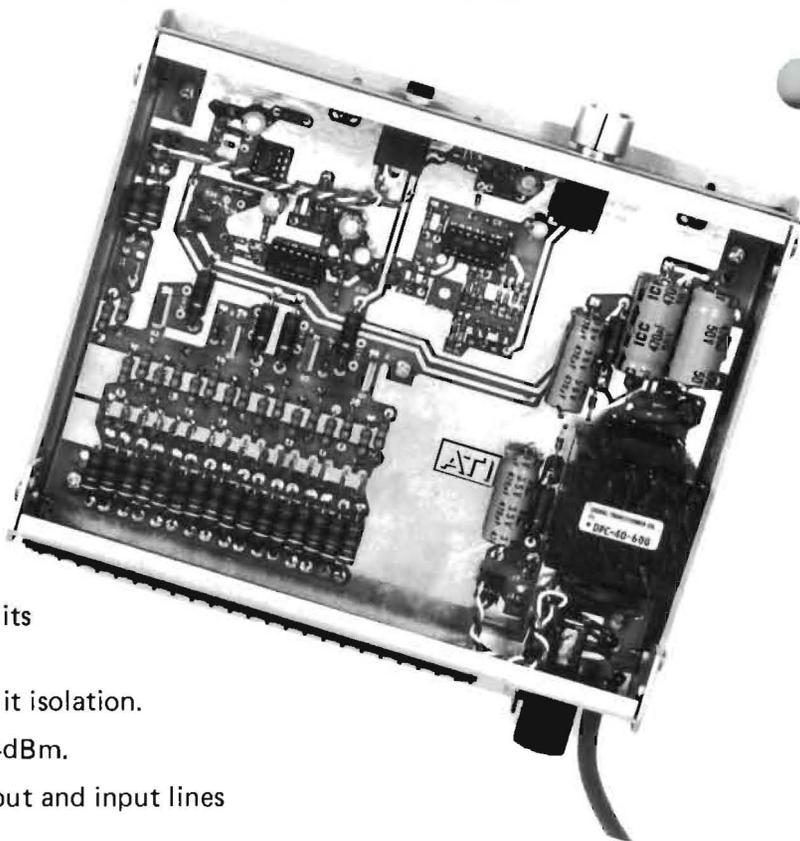

- Output clipping indicator
- Signal present indicator (DA1000)
- Front phone jack for headphones, metering or auxiliary ninth output
- Single or dual side by side rack mounting kits
- Eight active balanced outputs provide +24 dBm each with full short circuit isolation.
- Active balanced bridging inputs accept +24dBm.
- Heavy common mode bypassing of all output and input lines for superior RF protection.
- High slew rate power boosted NE5533 design provides totally transparent operation.

Sound Specifications

Output Clipping Level ... +24dBm/600 ohms
All channels fully loaded.

Distortion 0.2% maximum THD
20 to 20,000 Hz
Rated output and
inputs to +24dBm bridging

Frequency Response ± 0.25 db,
-3db at 100 KHz 20 to 20,000 Hz

Output Noise -70dBm maximum
20 KHz measurement bandwidth
600 ohm source impedance, full gain

Output Isolation 70 db min. at 1 KHz
Unit will tolerate up to 2 shorted outputs
with no reduction of headroom.

Gain +26db.
Front panel level control

Inputs 30 Kohm balanced
bridging, +24 dBm max.
80db hum CMR

Power 115/230 VAC $\pm 10\%$
47-63 Hz.

Size 8½"Wx1¾"Hx7" D, 4 lbs.

Terminals Rear Barrier Block
Fanning Strip Supplied.

Represented by:



**AUDIO
TECHNOLOGIES
INCORPORATED**

Dedicated to sound engineering
328 W. Maple Avenue
Horsham, PA 19044
(215) 443-0330

3 year limited warranty.

Technical specifications are subject to change at the discretion of the manufacturer.

Printed in U.S.A.
© 1980 Audio Technologies Incorporated